



A4	REVISIONS			
ZONE	REV	DESCRIPTION	DATE	APPROVED

额定电压 Rated Voltage	3.7V DC
使用环境范围 Operating Condition Tempertature Range	-10~+60℃
空载转速 Noload speed	23 ±3 rpm
空载电流 Noload Current	≤450 mA
负载转矩 Rated Torque	550 mN.m
负载转速 Rated Speed	20 ±2 rpm
负载电流 Rated Current	1.3A max
堵转电流 Stall Current	8A max
堵转力矩 Stall Torque	4 N.m min
旋向 Direction	CW/CCW
噪音 Noise	50 dB max
轴向间隙 Axial gap	0.05--0.3

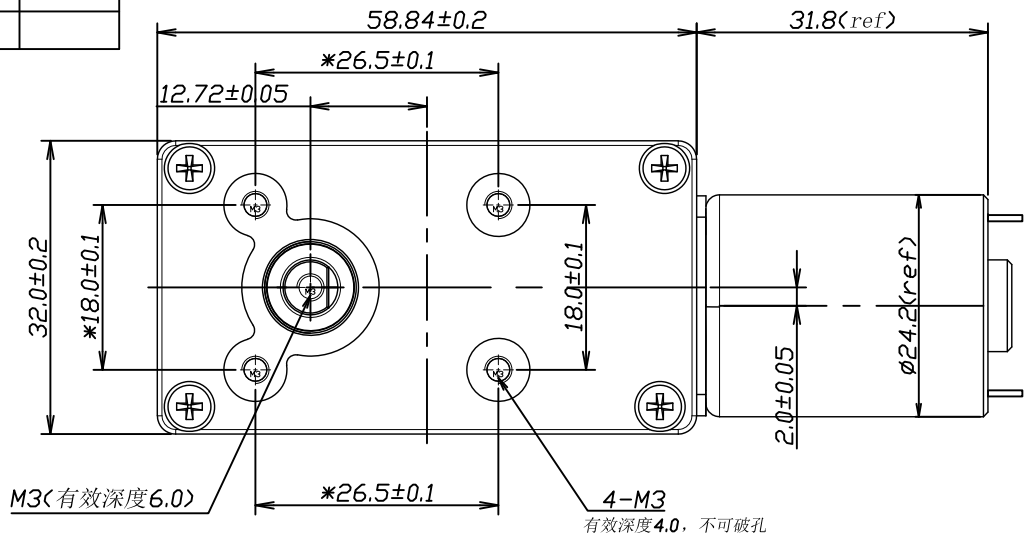

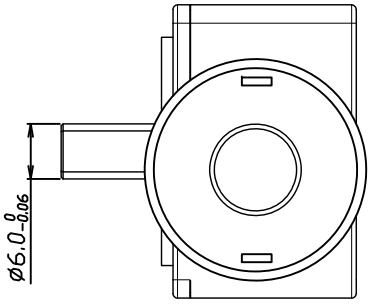

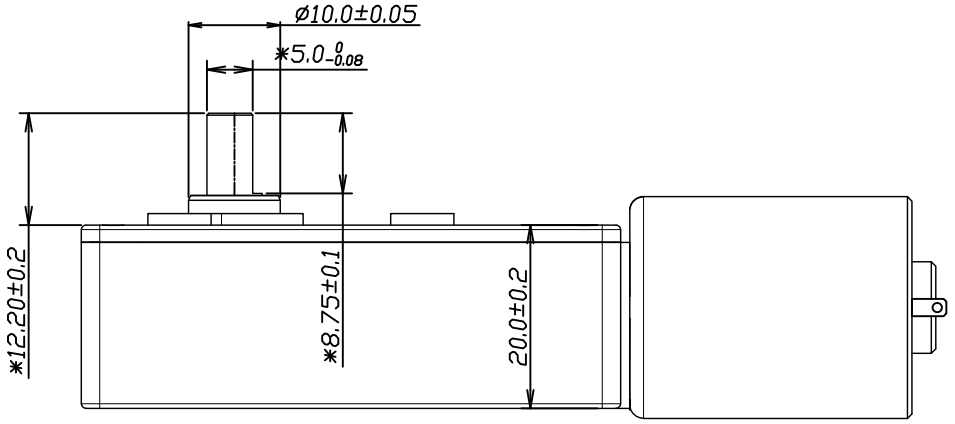

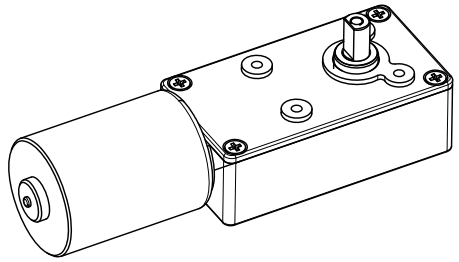

噪声测试方法：探头距减速器30cm,环境噪音31db测试

Noise test method: 30cm away from the reducer, environmental noise 31db

Tolerance (GB/T1804)	
Size Range	Tolerance
Under3	±0.05
3～6	±0.05
6～20	±0.1
Above20	±0.15

制图 Formulate	黄朝文	2023-11-24	外形图 Outside Drawing			客户确认 Confirmation Approved
审核 Audit	黄朝文	2023-11-24	PART NO.: GBCL-420-DZ23009-M			
批准 Approved			Scale	1:1	version	A
					重量	

FORWA 科华精密工业技术有限公司 FORWA PRECISION INDUSTRIAL TECHNOLOGY CO., LTD.