


NFP-180SHZ



Applications:

- Health Products
- Massager
- Beauty Equipment

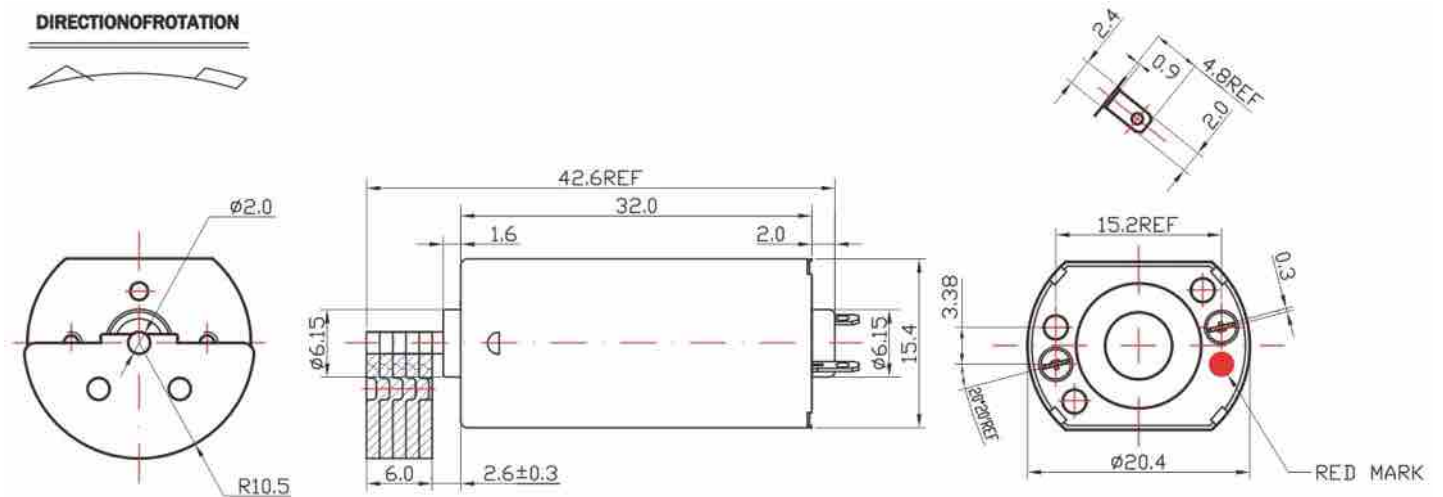

model	voltage	nom. V	load characteristics eccentric mass (mm)	current A	rate speed r/min	stall current A	out put power W	start voltage V
	range (v)							
NFP-180SHZ-A	1.5-3.5	2.40	R10.5*6.0 Eccentric Mass	0.60	4600	3.80	1.63	0.50
NFP-180SHZ-B	3.5-4.5	3.70	R10.5*6.0 Eccentric Mass	0.75	5500	2.70	2.97	1.00