


NFP-N25CAZ



Applications:

- Health Products
- Massager
- Beauty Equipment

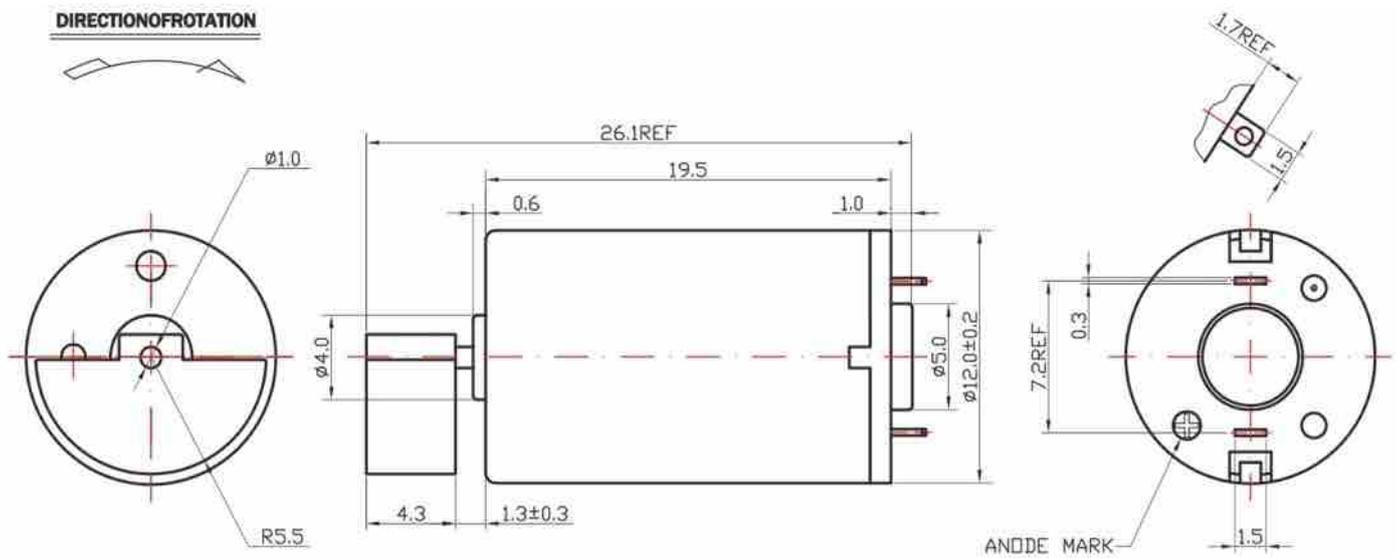

model	voltage	nom.	load characteristics	current	rate speed	stall current	out put power	start voltage
	range (v)	V	eccentric mass (mm)	A	r/min	A	W	V
NFP-N25CAZ-A	3.0-5.5	4.50	R5.5*4.3 Eccentric Mass	0.10	13500	0.90	0.54	0.70
NFP-N25CAZ-B	10.0MAX	9.00	R5.5*4.3 Eccentric Mass	0.20	17000	0.50	2.05	1.00
NFP-N25CAZ-C	1.0-2.5	1.50	R5.5*4.3 Eccentric Mass	0.30	10500	0.80	0.51	0.60